Nērvo bollard



Materials

Stainless steel + aluminum / wood

Ground fixing

Flange and expansion anchor (not included)

Finishing

Powder coating cycle, any RAL avaiable.
Suggested RAL:

Anthracite Grey

Slat finish

Decorative slats are available in aluminum with either powder coating in any RAL color or wood-effect sublimation (main wood essences), or alternatively in solid natural wood.

Sublimation

Painting

Colour Temperature

3000K o 4000K CRI > 80

Operating Voltage

220-240 V 50-60 Hz


LED life span

> 170 000 / B50 / L70

Dimming

On/off (other options available on request)

Optic



TYPE II-S


Lighting performance

	Current	Power	Luminous flux	
			3000 K	4000 K
TYPE II-S	500 mA	14 W	1534 lm	1657 lm

Standard

- EN 60598-1
- EN 60598-2-3
- EN 55015
- EN 62471
- EN 61000-3-2
- EN 61000-3-3

CE IP66

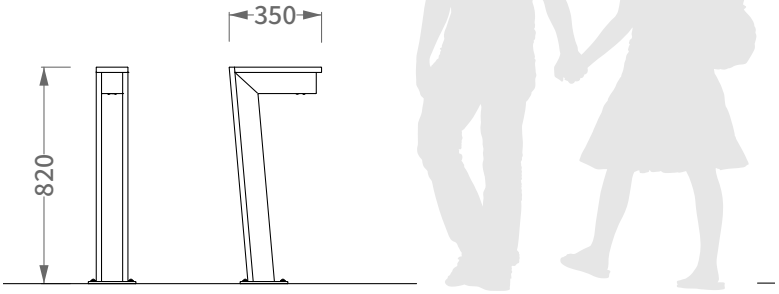

Bottega7 Srl | Via borello, 111 | 47522 Cesena [FC] | T +39 0547 373110 | C +39 334 6997342 |www.bottega7.com | info@bottega7.com

Rev. 0 | Data 08.04.2026