Halfcircle bollard



Materials

Stainless steel

Ground fixing

Inner flange and anchor bolts

Finishing

Powder coating cycle, any RAL avaiable.
Suggested RAL:

Anthracite Grey

Corten Effect

Colour temperature

2700/3000/4000K CRI > 80

Operating voltage

220-240 V 50-60 Hz


LED life span

> 170 000 / B50 / L70

Dimming

On/off (other options available on request)

Optic



TYPE II-S


Lighting performance

	Current	Power	Luminous flux	
			3000 K	4000 K
TYPE II-S	500 mA	14 W	1534 lm	1657 lm

Standard

- EN 60598-1
- EN 60598-2-3
- EN 55015
- EN 62471
- EN 61000-3-2
- EN 61000-3-3

CE **IP 66**

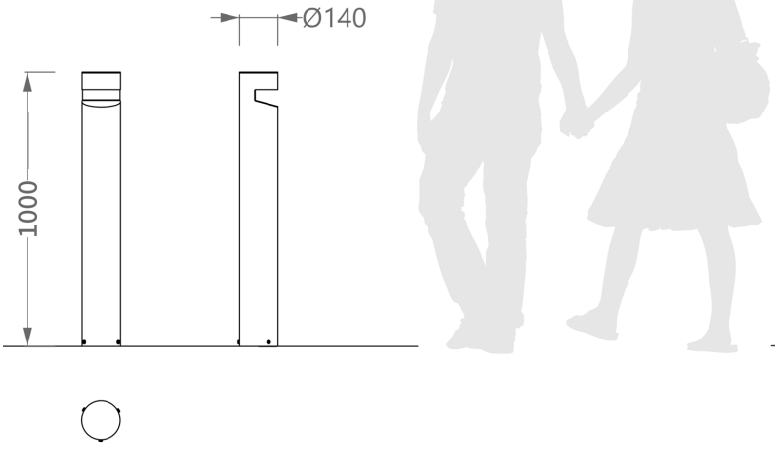

Bottega7 Srl | Via borello, 111 | 47522 Cesena [FC] | T +39 0547 373110 | C +39 334 6997342 |www.bottega7.com | info@bottega7.com

Rev. 0 | Data 13.11.2026